

For the Fastest Service Call 1-800-277-8830

Clean oil is an investment you can't afford NOT to make.

Hydraulic fluid contamination is the leading cause of

machine failures and lost production. CRS off-line filter carts and auxiliary dedicated filtration will:

- Reduce unplanned machine downtime
- Increase productivity
- Extend machine and component life
- Reduce scrap
- Increase profits to keep you competitive

Carts and kidney loop systems offer flows from 3 gpm to 14 gpm and filter ratings from 1 to 25* micron. CRS can assess your requirements for any system and



recommend optimum filtration to ensure maximum machine life and productivity. Fluid analysis training and fluid handling recommendations and assessment are also available to give you long-term results. Developing ongoing maintenance

programs to maximize productivity is essential in a competitive marketplace – we can help you with permanent solutions.



* Micron ratings greater than 10 microns absolute are not recommended for permanent hydraulic system filtration as they allow a build-up of "fines" – particles smaller than 6μ. Coarser ratings should be used for clean-up of highly contaminated systems only

Rochester Hills, MI Headquarters

1986 Rochester Industrial Drive Rochester Hills, Michigan 48309 PH: 248-652-9940 or 800-277-8830 FX: 248-652-9946 or 800-277-8831 sales@crsservice.com

Fort Worth, TX

2335 Handley Ederville Road Fort Worth, Texas 76118 PH: 817-590-2236 or 800-277-8842 FX: 817-590-2577 or 800-277-8832


Harrison, OH

108 May Drive Unit B Harrison, Ohio 45030 PH: 513-367-3800 or 800-277-8840 FX: 513-367-6577 or 800-277-8841



PORTABLE AND DEDICATED SINGLE AND DUAL FILTER ELEMENT UNITS FOR ANY APPLICATION

MFD

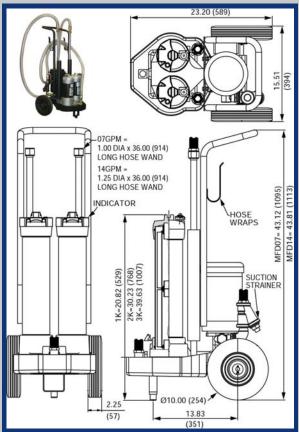

FEATURES:

- Modular design minimizes fittings and conductors to reduce potential leakage.
- Base ported assembly allows easy element change from top cap.
- Single, double and triple bowl lengths offer flexibility for your applications.
- Pre-sized hose and extension tubes included for ease of use.
- Low noise (72 dB)
- 115V AC single phase electric motor
- 30 psi bypass indicator
- Water removal as well as particle removing elements available.

Portable units are ideal for fluid transfer to machine reservoirs from: bulk storage, totes, drums, etc. New oil must be filtered before being used to replenish existing systems – always! These portable units are also ideal for reaching a target cleanliness level (TCL) prior to installing or as augmentation for permanent filtration upgrades to reach a TCL. If you don't know the target cleanliness for your machines or how to obtain them, call CRS Service at 800-277-8830 – we'll do it for you or teach you how to do it yourself!

Dedicated units are sized and rated to maintain the TCL for machines on a permanent basis. We'll help you size and spec your units for optimum results and increased fluid, component and system life.

MFS

